

How to setup extender via management page

Product line: Wireless Model number: A9

We can use A9 to extend our wireless network via button or management page.

This article will guide you set extender via management page. Before setting A9, please make sure that you can access to Internet. And check whether your computer is connect to the main router directly. Steps are as follow:

Part 1: [Login to the management page](#)


Part 2: [Configure the extension](#)

Part 3: [Adjust the placement of A9](#)

Part 1

Login to the management page


1. Get the default WiFi name from the A9's fuselage stickers, and then use a laptop or mobile phone connected to the WiFi signal..
2. Open a browser and type **re.tenda.cn** or **192.168.0.254** in the **Address bar**, click **Enter**, then you can access to the homepage

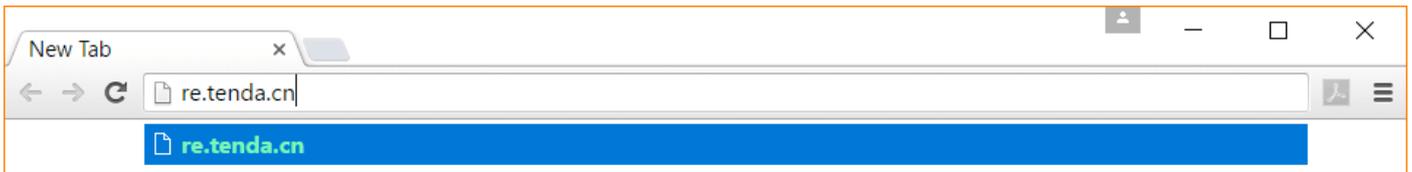

Part 2

Configure the extension

1. Select the WiFi name of the main router and click **Next**.

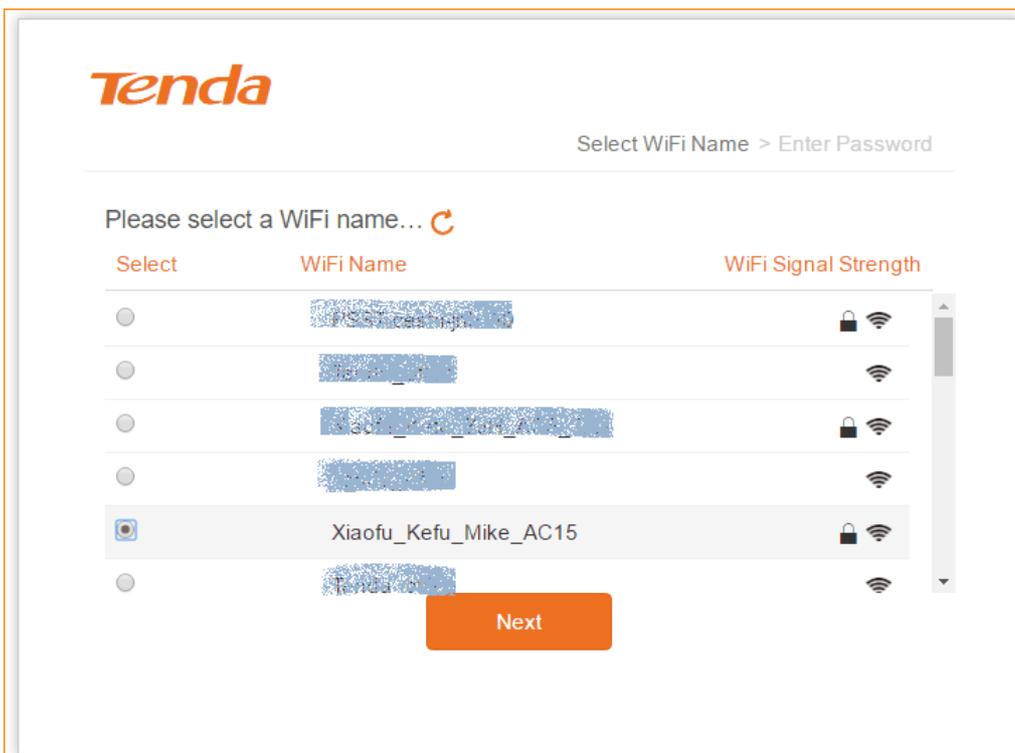

2. Enter the **WiFi password of the main router** and click **Finish**

Tenda

Select WiFi Name > Enter Password

Base Station WiFi Name: Xiaofu_Kefu_Mike_AC15

Enter the WiFi password of the Base Station

- Set up the extender's WiFi name and password to the same as those of the Base Station

Back

Finish

(If you want to set the extender's WiFi name and password separately, please cancel the following check to set it)

Tenda

Select WiFi Name > Enter Password

Base Station WiFi Name: Xiaofu_Kefu_Mike_AC15

.....

- (1) **Cancel the check** Set up the extender's WiFi name and password to the same as those of the Base Station

WiFi Name of the Extender

WiFi Password of the Extender


(2) **set the extender's WiFi name and password**

Back


Finish

(3)


3. Expanding, please wait.

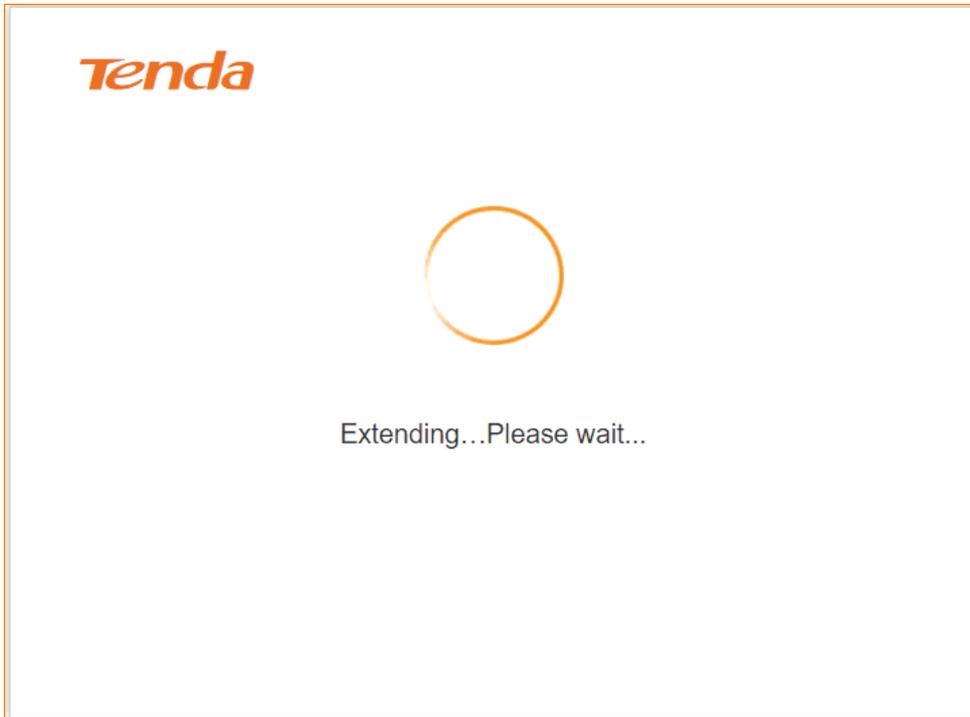

4. After a while it will show "**Extended successfully**" and prompts the current extender's WiFi name, you need to re-connect the WiFi.

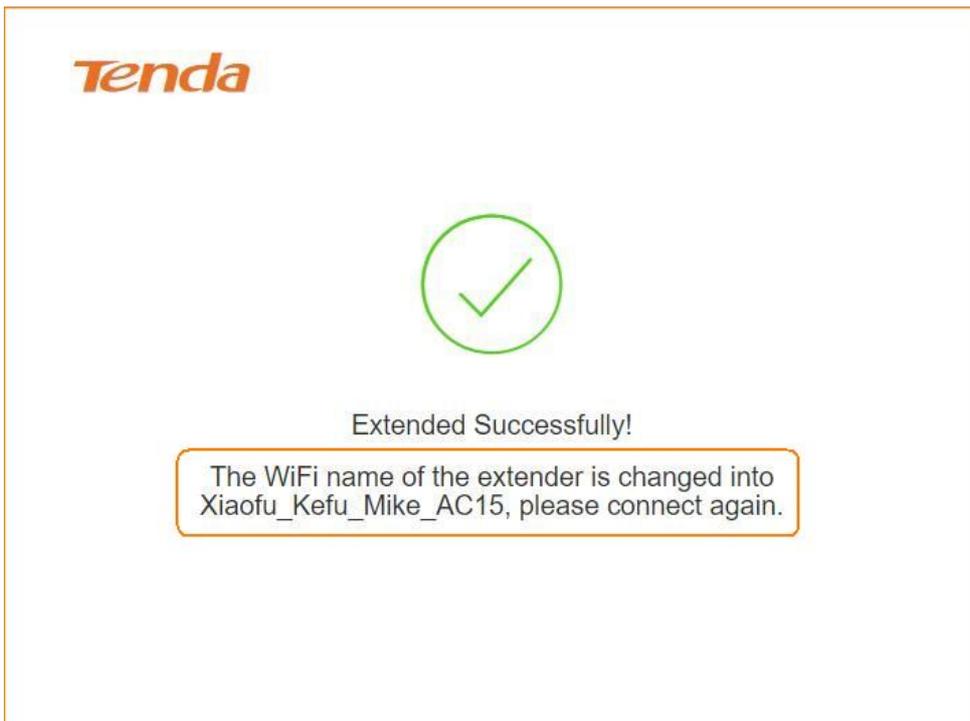

5. After laptop or mobile phone re-connect the Extender's WiFi, refresh the browser page, you will access to the main page.

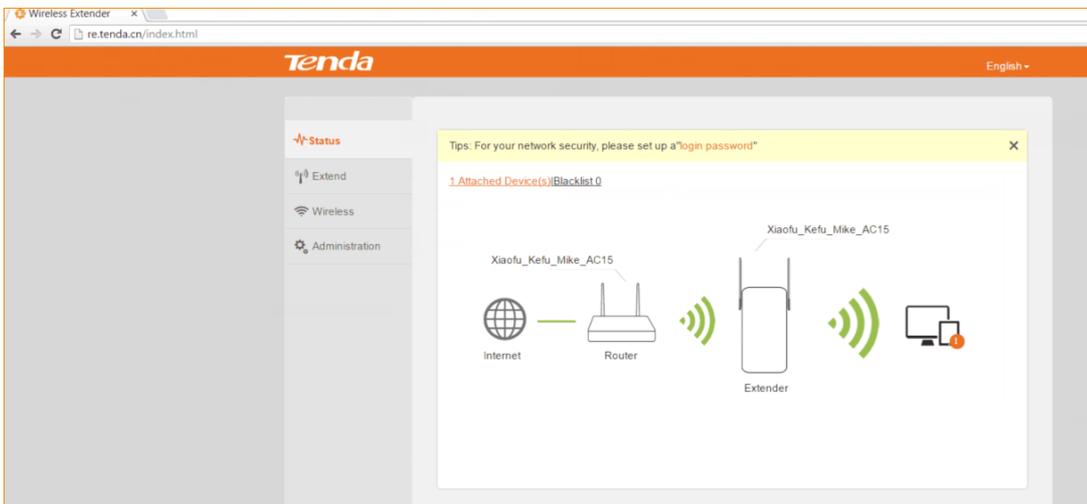

Part 3

Adjust the placement of the A9

1. The signal strength icon between the router and the extender represents the strength of the mainrouter signal received by the extender. We recommend that the extender be placed at a signal strength of about 50%.

